



DAİRESEL TAVAN DİFÜZÖRÜ / CIRCULAR CEILING DIFFUSER

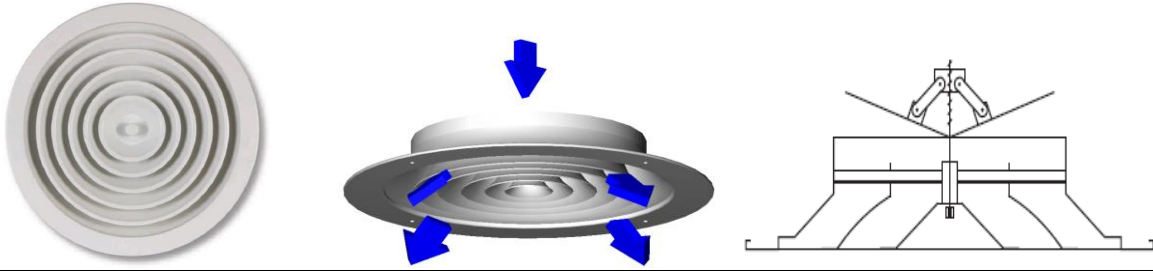

DTD PRODUCT SPECIFICATIONS:

- Standard Material: Aluminum profile. Usable for both supply and return air ducts.
- The circular design guarantees a uniform radial discharge of supply air application.
- Usable for places up to 4m. height.
- On request, damper can be added to control flowing air volume.
- Mounted with 4 mm screws on frame. Optional: Clips or Plate-spring applications.
- Eloxal, anodizing or electrostatic powder coating with the color from RAL catalogue.

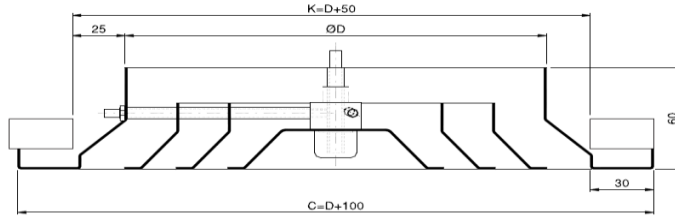

Dairesel Tavan Difüzörü Seçim Tablosu
Circular Ceiling Diffuser Selection Table

Boğaz Çapı Neck Diameter ØDmm	Faydalı Alan Effective Area m ²	HAVA HIZLARI / AIR VELOCITY m/h								
		1,5	2,0	2,5	3,0	4,0	5,0	6,0	7,0	8,0
100	0,0040	22	29	36	43	58	72	86	101	115
150	0,0085	46	61	77	92	122	153	184	214	245
200	0,0157	85	113	141	170	226	283	339	396	452
250	0,0257	139	185	231	278	370	463	555	648	740
300	0,0381	206	274	343	411	549	686	823	960	1097
350	0,0536	289	386	482	579	772	965	1158	1351	1544
400	0,0730	394	526	657	788	1051	1314	1577	1840	2102
450	0,0955	516	688	860	1031	1375	1719	2063	2407	2750
500	0,1150	621	828	1035	1242	1656	2070	2484	2898	3312
550	0,1920	1037	1382	1728	2074	2765	3456	4147	4838	5530

Not: Hava Miktarı m³/h – Air Volume m³/h



HVAC Systems and Equipments Co.
İklimlendirme Sistemleri San.Tic.Ltd.
Orhanlı (Orta Mah.) Livan St. No:10 Tuzla – İstanbul /
TURKEY

+0090 216 3773360
+0090 216 3772730
www.gmcgrup.com